



ECO LINE

Wall / window axial fans



ECO GF
Fixed grille

ECO GG
Gravity shutter




ECO A
Automatic




Comply with ErP Directive 2009/125/CE and EU Regulation 1253/2014 (Classification: Residential Ventilation Unit)

- To exhaust air directly to the outside or into a short length ducting (max 3 m length).
- Suitable for toilets, bathrooms, WC's, shower-rooms, utility rooms and kitchens.
- Wide range: 27 models all suitable for wall, window and ceiling installation.
- Low energy consumption and high performance for a quick and efficient extraction of stale air.


INSTALLAZIONI

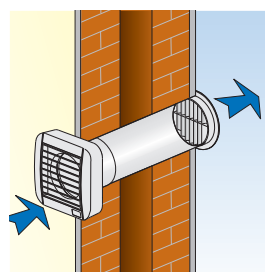

WALL

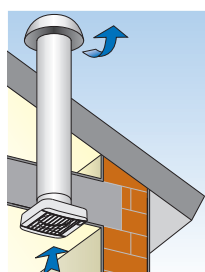

CEILING

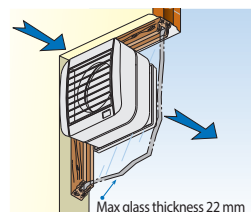

WINDOW
(with window kit)

Max glass thickness 22 mm



PERFORMANCES

MODELS	m³/h	Is	Pa	W	dB (A)*
ECO 100	90	25	26	11	39
ECO 120	170	47	39	15	42
ECO 150	320	89	69	25	49

* LpA measured at 3 m in open field 230v - 50Hz.

VERSIONS



STANDARD

On/off through light or remote control switch



PULL CORD

On/off through pull cord switch



TIMER

Integral electronic timer adjustable from 3 to 25 minutes



MHT

Humidity control, adjustable from 40 to 80% of R.H.



2 SPEED


24 hours running at the lowest speed



SELV

SELV 12 V a.c. (only GG and GF models)

DIMENSIONS (mm)

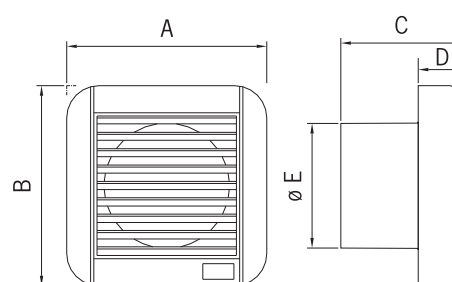

MODELS	A	B	C	D	E	Kg.
ECO 100 GF	155	155	92	35	97	0,5
ECO 120 GF	180	180	121	51	119	0,8
ECO 150 GF	209	209	137	52	149	1,2
ECO 100 GG	155	155	92	35	97	0,5
ECO 120 GG	180	180	121	51	119	0,8
ECO 150 GG	209	209	137	52	149	1,2
ECO 100 A	155	155	101	44	97	0,6
ECO 120 A	180	180	121	51	119	0,8
ECO 150 A	209	209	137	52	149	1,2