



FEATURES


- To exhaust air directly to the outside.
- Suitable for domestic and commercial applications.
- For wall, window, double glazed and double window installation.
- Completely automatic: silent and slow shutter operation via thermal actuator.
- Delayed action.
- Available models: 6" and 9".
- Manufactured in shock-proof high quality technopolymer.
- Aluminium impeller / Plastic version also available.
- Provided with an external rain protected grille IPX4.
- Maintenance free, self lubricating sleeve bearing motor for long life and noiseless running.
- Thermal protected induction motor, 220V - 60 Hz.
- Speed controllable.
- Fans comply with EN 60335-2-80, B.T. 2006/95/CE, EMC 2004/108/CE.

VERSIONS

VITRO 6/150 A 220V - 60Hz.

VITRO 6/150 PA (Potentiated) 220V - 60Hz.

VITRO 9/230 A 220V - 60Hz.




**SUPPLIED
WITH KIT
FOR WALL
INSTALLATION**

PERFORMANCE

MODEL	V-Hz	m³/h	l/s	Pa	W	dB (A) LpA 3 mt*
VITRO 6/150 A	220-60	174	48	17	20	29,4
VITRO 6/150 PA Potentiated	220-60	305	85	49	40	40,6
VITRO 9/230 A	220-60	664	184	106	47	42

* measured at 3 m in open field.

DIMENSIONS (mm)

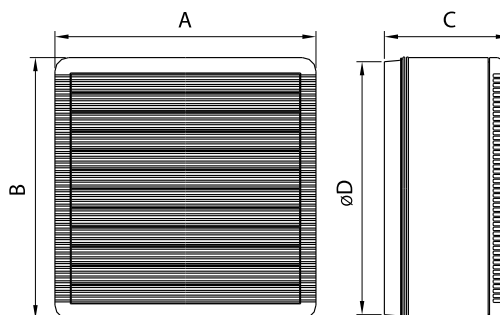

MODEL	A	B	C	Ø D (GLASS HOLE)	Kg
VITRO 6/150	195	195	126	184÷188	1,7
VITRO 9/230	287	287	138	254÷258	3,5